

Strainer 600 lbs Y-type, with flanged ends and drain-plug 1/2" in cover



Materials: Body: cast steel A216 WCB, Screen: stainless steel 1.4301, Gasket: graphit reinforced

Connection: flanged ends ANSI

Test pressure: 153 bar

DN	L	A	Mesh-width*	Weight (kg)	Article No.**
2"	292	200	1,00	50,00	0206535200200
3"	356	250	1,00	62,00	0206535200300
4"	432	270	1,00	69,00	0206535200400
6"	559	340	1,50	135,00	0206535200600
8"	660	470	1,50	287,00	0206535200800
10"	787	570	2,00	550,00	0206535201000


* Fine screens at all nominal diameters mesh width 0,25 mm, free area 37%

** When ordering with fine screen: Article-Nr. + addition "with F-SIEB"

DN	L1	D1	Fo	KVS1	KVS2	Zet1	Zet2	ø G	ø R	P	D	B
2"	95	42						74	61	3,2		
3"	155	85						85	70	3,2		
4"	190	110						130	112	3,2		
6"	240	155						180	160	3,2		
8"	285	210						235	215	3,2		
10"	360	240						275	255	3,2		

The delivery of the strainer is in accordance to PED 2014/68/EU Point 11 and 12 of the preamble and article 1, clause c as well as article 4, clause 3.
The picture shown is only a symbolic photo! Subject to technical changes and errors.

Key for our datasheets

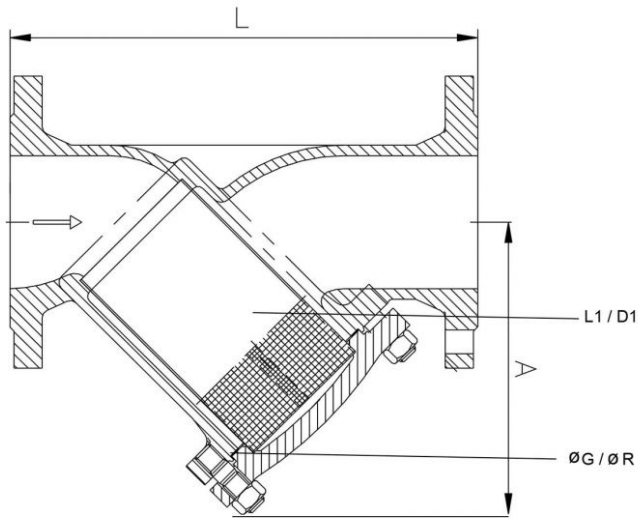

DN	Nominal diameter
L	Face to face dimension (mm)
A	Centre line of pipe to end of cover (mm)
L1	Screen length (mm)
D1	Screen diameter (mm)
Fo	Free screen area standard element (mm)
KVS1	KVS-Value standardscreen (m ³ /h)
KVS2	KVS-Value fine screen (m ³ /h)
Zet1	Zeta-Value standardscreen
Zet2	Zeta-Value fine screen
Ø G	Outer-diameter coverflange gasket (mm)
Ø R	Inner-diameter coverflange gasket (mm)
P	Thickness coverflange gasket (mm)
D	Coverflange size
B	Distance required to remove screen (mm)