

Strainer PN 10 Y-type, with flanged ends and drain-plug 1/2" in cover



- Materials:** Body: cast iron JL 1040, Screen: stainless steel 1.4301 (from DN 150 perforated plate 1.4301), Gasket: graphit reinforced
- Connection:** flanged ends DIN
- Test pressure:** 15 bar
- Specials:** with magnetit seperator - Valves made of cast iron are not authorized for use in systems subject TRD110.

DN	L	A	Mesh-width*	Weight (kg)	Article No.**
200	600	360	1,20	111,00	9601020003
250	730	550	1,20	220,00	9601025003
300	850	610	1,20	272,00	9601030003

* Fine screens at all nominal diameters mesh width 0,25 mm, free area 37%


** When ordering with fine screen: Article-Nr. + addition "with F-SIEB"

DN	L1	D1	Fo	KVS1	KVS2	Zet1	Zet2	ø G	ø R	P	D	B
200	360	208	36 %	738,0	692,1	4,70	5,34	240	209	2,0	Ø 290	580
250	336	231	35 %	1134,0	997,2	4,86	6,29	319	275	2,0	Ø 345	830
300	386	281,5	35 %	1561,5	1368,0	5,32	6,93	379	320	2,0	Ø 401	950

The delivery of the strainer is in accordance to PED 2014/68/EU Point 11 and 12 of the preamble and article 1, clause c as well as article 4, clause 3.

The picture shown is only a symbolic photo! Subject to technical changes and errors.

Key for our datasheets

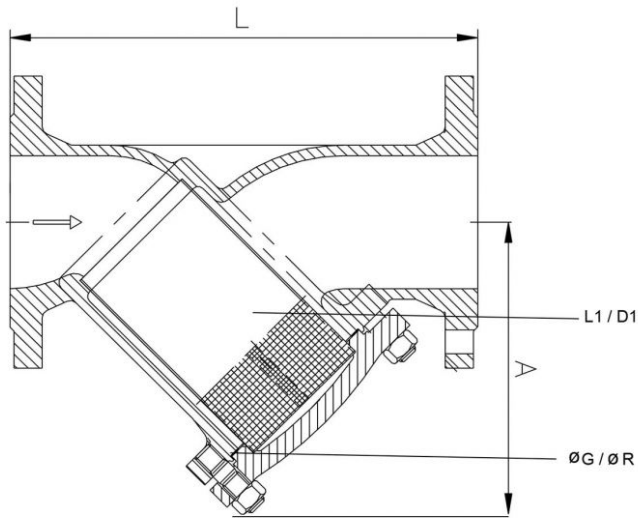

DN	Nominal diameter
L	Face to face dimension (mm)
A	Centre line of pipe to end of cover (mm)
L1	Screen length (mm)
D1	Screen diameter (mm)
Fo	Free screen area standard element (mm)
KVS1	KVS-Value standardscreen (m ³ /h)
KVS2	KVS-Value fine screen (m ³ /h)
Zet1	Zeta-Value standardscreen
Zet2	Zeta-Value fine screen
ø G	Outer-diameter coverflange gasket (mm)
ø R	Inner-diameter coverflange gasket (mm)
P	Thickness coverflange gasket (mm)
D	Coverflange size
B	Distance required to remove screen (mm)